

■ BITTA II Architectural Lighting



Application

Commercial Lighting, Architectural and Landscape.

Characteristic

Light source	: Mid Power LED
Power correction factor	: > 0.9
Insulation	: Class 1
Ingress Protection (IP)	: IP65
Colour rendering (CRI)	: ≥ 70
Colour temperature (CCT)	: 3000K ~ 6500K
<i>Other CCT & CRI available upon request</i>	
Weight	: 9.9 kg - 13.8 kg
Wattage	: 10W
Nominal efficacy	: 80 ~ 100 lm/W
Useful life	: 50,000 hours ~ Base on the light source
Operating temperature range (Ta)	: -35°C ~ 50°C
Main voltage	: 200 ~ 240V / 50 ~ 60Hz

Features

- Pressure die cast aluminum housing and corrosion resistant
- Finishes with polyster powder paint. Standard colour grey.
- Stainless steel screws and clip.
- Anti-ageing silicone rubber seals.
- Polycarbonate diffuser.

Product Speciality




Aesthetics design

Ordering Code Dimension : BITTA II

Code	Wattage	Leds	Nominal Flux	a	b	Weight(kg)
BII012050	12W	42	960	500	Ø118	9.9
BII012050	12W	42	960	800	Ø118	13.8

* The above ordering code is base on CCT~5000K

Dimension (mm)

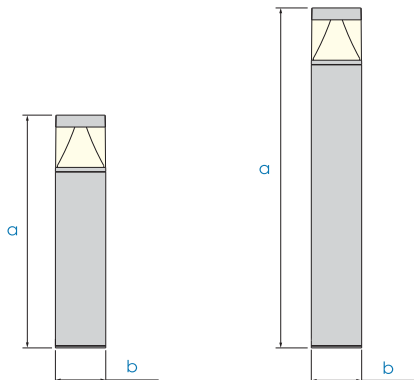

Photometry

