

■ CAPRI Industrial Lighting



Application

Parking Area, Canopy, Loading Bays, Industrial, Production Area, Integrated Transit, Factories and Foundries

Characteristic

Light source	: SMD 2835
Power correction factor	: > 0.9
Ingress Protection (IP)	: IP65
Colour rendering (CRI)	: ≥ 70
Colour temperature (CCT)	: 3000K & 6000K
<i>Other CCT & CRI available upon request</i>	
Weight	: 1.5 kg
Wattage	: 30W & 50W
Beam Angle	: 120°
Nominal efficacy	: 120 lm/W
Useful life	: > 30,000 hours ~Base on the light source
Operating temperature range (Ta)	: -20°C ~ 40°C
Driver	: Built-in high efficiency system
Main voltage	: 85~265V / 50~60Hz

Features


- Die cast aluminium
 - Pleasant appearance
 - Convenient sturdy & light weight
 - Affordable & economical
 - Standard colour black
 - PC milky diffuser
 - Microwave* / Motion Sensor*
- * Item upon request

Ordering Code Dimension : CAPRI

Code	Wattage	Nominal Flux	a	b	c	Weight(kg)
CAP03030	30W	3600lm	309	275	177	1.5
CAP05030	50W	6000lm	309	288	182	1.5

* The above ordering code is base on CCT~3000K

Dimension (mm)

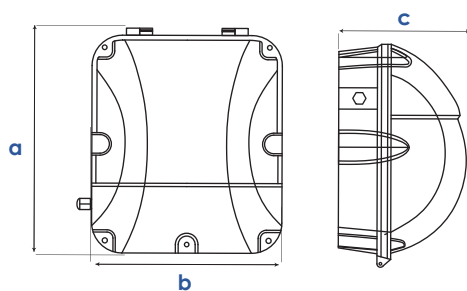

Photometry 120D

