

## ■ NEPTUNE Industrial Lighting



### Application

Parking Area, Canopy, Loading Bays, Industrial, Production Area, Integrated Transit, Factories and Foundries

### Characteristic

Light source	: LED / Fluorescent tube
Ingress Protection (IP)	: IP65
Weight	: 1.0kg ~ 2.0kg
Wattage	: 10W , 20W (LED tube) : 18W , 36W (Fluorescent tube)*
Nominal efficacy	: 80 ~ 100 lm/W
Useful life	: > 30,000 hours ~Base on the light source
Operating temperature range (Ta)	: -25°C ~ 40°C
Main voltage	: 220~240V / 50~60Hz

### Features

- Clip-on toggles
- UV stabilized PC body and diffuser.
- Affordable & Reliable
- Dust proof & Moisture proof
- Microwave\* / Motion Sensor\*
- \* Item upon request

### Installation Options

#### T8 LED tube

- Empty with T8 LED tube wiring (Standard with double ended)
- Complete with LED tube
- Complete with LED tube and 3hrs Power Pack


#### T8 Fluorescent tube

- Empty with T8 Fluorescent tube wiring
- Complete with T8 Fluorescent tube and electronic ballast
- Complete with T8 Fluorescent tube, electronic ballast and 3hrs Power Pack

**Ordering Code Dimension : NEPTUNE**

Code	Wattage	a	b	c	Size(ft)	Weight(kg)
NEP118	1X10W	655	91	97	2'	1.0
NEP218	2X10W	655	138	97	2'	1.2
NEP136	1X20W	1270	91	97	4'	1.6
NEP236	2X20W	1270	138	97	4'	2.0

**Dimension (mm)**

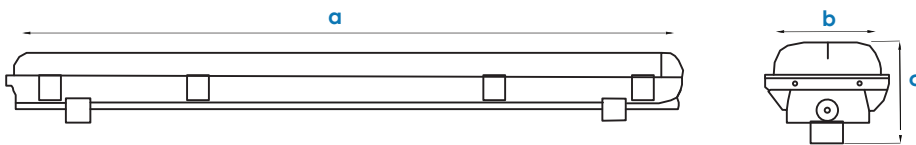

**Photometry**

