

# ■ STECH UFO UGR Industrial Lighting




### Optional

Remote Control System & Smart Intelligent System available upon request



Energy saving with remote control system



Network for smart intelligent system

### Application

Factories, Warehouses, Logistic Halls, Production Facilities, Exhibition Hall, Showroom, Indoor Arena.


### Characteristic

Light source	: High Performance LED
Power correction factor	: > 0.95
Insulation	: Class 1
Compliance	: MS IEC 60598-1
Ingress Protection (IP)	: IP65
Colour rendering (CRI)	: ≥ 80
Colour temperature (CCT)	: 3000K ~ 6500K
<i>Other CCT &amp; CRI available upon request</i>	
Weight	: 1.7kg ~ 3.3kg
Mounting Option	: Hook Hanging/ Ceiling Mounting
Wattage	: 100W ~ 200W
Nominal efficacy	: 135 lm/W - 160 lm/W
Useful life	: > 50,000 hours ~Base on the light source
Operating temperature range (Ta)	: -30°C ~ 45°C
Driver	: Built-in high efficiency system
Main voltage	: AC 100 ~ 270V / 50~60vHz

### Features

- Die-cast aluminium housing.
- Corrosion resistant.
- Finished with polyester powder paint.
- Standard colour black.
- Anti-aging silicon rubber gasket.
- Clear PC cover
- Integral control gear mounted on the housing for easy maintenance.
- Stainless steel screws.
- Low UGR

### Product Speciality



Zhaga Base



Optional:  
Ceiling Mounting



Optional :  
Bluetooth or  
Remote Control




Optional :  
Aluminum / PC reflector

**Ordering Code Dimension : STECH UFO UGR**

Code	Wattage	Nominal Flux	a	b	c	d	Weight(kg)
SUR10060	100W	16000	∅280	55	116	173	2.4
SUR15060	150W	24000	∅280	55	116	173	2.4
SUR20060	200W	32000	∅320	55	116	173	3.3

\* The above ordering code is base on CCT~6000K

**Dimension (mm)**

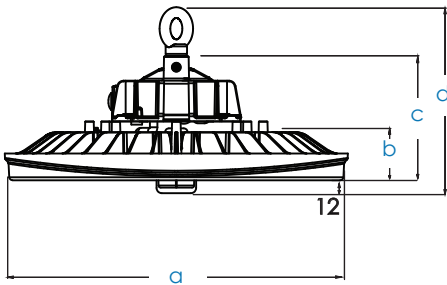

**Photometry 80D**

