

## ZENITH Ceiling LED Panel Light



### Application

Office, Building, Hospital, Retail, Museum

### Characteristic


Light source	: LED
Power correction factor	: > 0.9
Compliance	: IEC 60598-1 : IEC 60598-2-2
Ingress Protection (IP)	: IP20
Colour rendering (CRI)	: ≥ 80
Colour temperature (CCT)	: 3000K ~ 6500K
<i>Other CCT &amp; CRI available upon request</i>	
Weight	: 9.2 kg - 30.1 kg
Beam Angle	: 120°
Wattage	: 20W ~ 60W
Nominal efficacy	: 120 lm/W
Useful life	: 50,000 hours ~ <i>Base on the light source</i>
Operating temperature range (Ta)	: -10°C + 35°C
Driver	: Non-Dimming : 0 ~10V Dimming*
Main voltage	: 220 ~ 240V / 50 ~ 60Hz
Unified glare rating(UGR)	: ≤ 22 standard : ≤ 19*

### Features

- TUV tested (IEC standard).
- Flicker free.
- Unified glare rating (UGR) ≤19/≤22.
- High efficacy @ 120 lm/w.
- Smart / motion & photocell sensors\*.
- Power factor 0.90.
- Stainless steel screws.

\* Item upon request.

### Product Speciality




Sustainability  
 Enhancement

**Ordering Code Dimension : ZENITH**

Code	Wattage	Lumen (lm)	Size (mm)	Size (ft)	Pcs/Ctn	Weight(kg)
ZEA02060	20W	2400lm	305x605x30mm	1'x 2'	6	9.2
ZEB03660	36W	4320lm	605x605x30mm	2'x 2'	6	14.9
ZEC03660	36W	4320lm	305x1205x30mm	1'x 4'	6	13.5
ZED06060	60W	7200lm	605x1205x30mm	2'x 4'	4	30.1

\* The above ordering code is base on CCT~ 6000K

\* Other CCT upon request

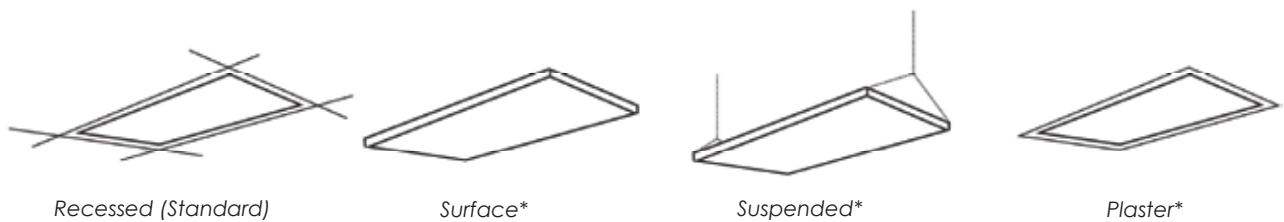

**Photometry**

