

## ■ VETO-PRO/R LED Indoor Lighting

### Application

Office, Building, Hospital, Retail, Museum.



### Characteristic

Light source	: LED
Power correction factor	: 0.9
Beam angle	: 60°
Ingress Protection (IP)	: IP20
Colour rendering (CRI)	: ≥ 80
Colour temperature (CCT)	: 3000K ~ 5000K
Wattage	: 10W ~ 50W
Nominal efficacy	: ≥100 lm/W
Useful life	: > 50,000 hours ~ <i>Base on the light source</i>
Operating temperature range (Ta)	: - 15°C + 45°C
Main voltage	: 220 ~ 240V / 50 ~ 60Hz
Unified glare rating(UGR)	: ≤ 16 standard

### Features

- Die-casting aluminum housing
- Deep reflector cup, providing anti-glare performance
- Metal buckle design, strong elastic, easy to install, safer to use
- Anti-glare opal polycarbonate diffuser
- Dimming function & microwave / motion sensor\*


\*available upon request

### Ordering Code Dimension : VETO-PRO/R

Code	Wattage	Nominal Flux	a	b	Cutout
VPR01040	10W	1000	65	∅115	∅100
VPR02040	20W	2000	80	∅140	∅125
VPR03040	30W	3000	85	∅160	∅145
VPR04040	40W	4000	98	∅198	∅175
VPR05040	50W	5000	102	∅230	∅215

\* The above ordering code is base on CCT~4000K

### Dimension(mm)

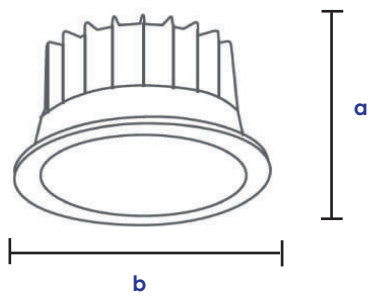

### Photometry

