

■ Veto-DL LED Indoor Lighting



Application

Office, Building, Hospital, Retail, Museum.

Characteristic

Light source	: SMD
Power correction factor	: 0.9
Beam angle	: 90°
Compliance	: IEC 62471
	: IEC 62776
Ingress Protection (IP)	: IP20
Colour rendering (CRI)	: ≥ 80
Lamp base	: G5
Weight	: < 0.5 kg
Wattage	: 7W ~ 40W
Nominal efficacy	: 100 lm/W
Useful life	: > 50,000 hours ~ Base on the light source
Operating temperature range (Ta)	: -15°C + 45°C
Main voltage	: 200 ~ 260V / 50 ~ 60Hz
Unified glare rating(UGR)	: ≤ 16 standard


Features

- Die-casting aluminum radiator with higher heat dissipation efficiency
- Honeycomb Mesh, effectively prevent excess astigmatism
- Deep reflector cup, providing anti-glare performance
- Metal buckle design, strong elastic, easy to install, safer to use
- Dimming function & microwave / motion sensor available upon request

Ordering Code Dimension : VETO-DL

Code	Wattage	a	b	Cutout
VETDL0740	7W	45	ø90	ø75
VETDL1040	10W	65	ø110	ø95
VETDL1540	15W	68	ø130	ø105
VETDL2040	20W	90	ø165	ø140
VETDL3040	30W	65	ø190	ø165
VETDL4040	40W	105	ø225	ø200

Dimension(mm)

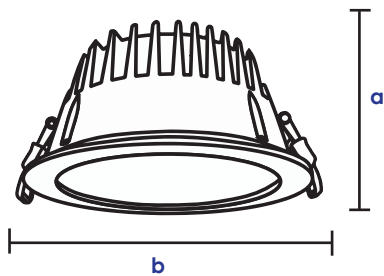

Photometry

