

■ VETO-IP LED Indoor Lighting



Application

Office, Building, Hospital, Retail, Museum.

Characteristic

| | |
|----------------------------------|--|
| Light source | : LED |
| Power correction factor | : 0.9 |
| Beam angle | : 15°/24°/38°/45°/60° |
| Ingress Protection (IP) | : IP65 |
| Colour rendering (CRI) | : ≥ 90 |
| Colour temperature (CCT) | : 2700K ~ 6000K |
| Wattage | : 15W ~ 40W |
| Nominal efficacy | : ≥80 lm/W |
| Useful life | : >50,000 hours ~ Base on the light source |
| Operating temperature range (Ta) | : 0°C + 40°C |
| Main voltage | : 220 ~ 240V / 50 ~ 60Hz |
| Unified glare rating(UGR) | : ≤ 16 standard |

Features


- Die-casting aluminum radiator with higher heat dissipation efficiency
- Honeycomb Mesh, effectively prevent excess astigmatism
- Deep reflector cup, providing anti-glare performance
- Metal buckle design, strong elastic, easy to install, safer to use
- Dimming function available upon request
- Visual comfort, and product diversification
- Anti-glare opal polycarbonate diffuser

Ordering Code Dimension : VETO-IP

| Code | Wattage | Nominal Flux | a | b | Cutout |
|----------|---------|--------------|-----|------|--------|
| VIP01540 | 15W | 1200 | 78 | ø92 | ø80 |
| VIP02540 | 25W | 2000 | 93 | ø123 | ø110 |
| VIP04040 | 40W | 3200 | 106 | ø145 | ø130 |

* The above ordering code is base on CCT~4000K

Dimension(mm)

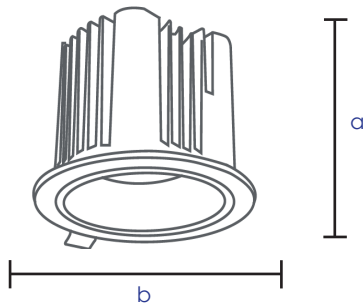

Photometry

