

## ■ VETO-PRO/S LED Indoor Lighting



### Application

Office, Building, Hospital, Retail, Museum.

### Characteristic

Light source	: LED
Power correction factor	: 0.9
Beam angle	: 60°
Ingress Protection (IP)	: IP20
Colour rendering (CRI)	: ≥ 80
Colour temperature (CCT)	: 3000K ~ 5000K
Wattage	: 10W ~ 40W
Nominal efficacy	: > 100 lm/W
Useful life	: > 50,000 hours ~ Base on the light source
Operating temperature range (Ta)	: - 15°C + 45°C
Main voltage	: 220 ~ 240V / 50 ~ 60Hz
Unified glare rating(UGR)	: ≤ 16 standard

### Features

- Die-casting aluminum housing
- Deep reflector cup, providing anti-glare performance
- Metal buckle design, strong elastic, easy to install, safer to use
- Anti-glare opal polycarbonate diffuser
- Dimming function & microwave / motion sensor\*


\*available upon request

**Ordering Code Dimension : VETO-PRO/S**

Code	Wattage	Nominal Flux	a	b	c	Cutout
VPS01040	10W	1000	65	115	115	L100 x W100
VPS02040	20W	2000	75	140	140	L125 x W125
VPS03040	30W	3000	80	160	160	L145 x W145
VPS04040	40W	4000	95	195	195	L180 x W180

\* The above ordering code is base on CCT~4000K

**Dimension(mm)**

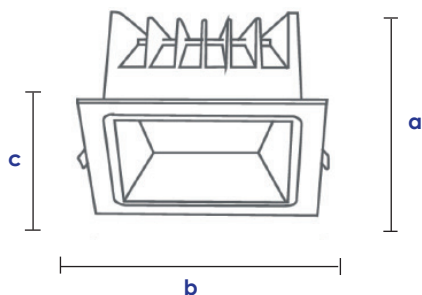

**Photometry**

