

■ VENTURE Road Lighting



Application

Roadway, Residential Areas, Industrial Areas,
 Parking Areas, Factory Perimeter & Etc.

Characteristic

Light source	: EMC 5050
Optical	: PC Lens modules : Multiple beams : Anti glare optic
Power correction factor	: > 0.9
Compliance	: MS IEC 60529
Ingress Protection (IP)	: IP65
Protection against surge (SPD)	: 10KA ~ 20KA
Colour rendering (CRI)	: ≥ 70
Colour temperature (CCT)	: 3000K ~ 6000K
<i>Other CCT & CRI available upon request</i>	
Weight	: 3.1 kg ~ 4.5 kg
Wattage	: 20W ~ 120W
Nominal efficacy	: 120 ~ 150 lm/W
Useful life	: > 50,000 hours ~ <i>Base on the light source</i>
Operating temperature range (Ta)	: -30°C ~ 50°C
Driver	: 1 ~ 10V dimmable driver*
Main voltage	: 100~ 277V / 50~60Hz

Features

- Die cast aluminium alloy housing.
 - Pleasant Appearance
 - Robust & compact
 - Convenient, sturdy & light weight
 - Affordable & economical
 - Microwave* / Motion Sensor*
- *Item upon request

Product Speciality




Compact & Light Weight

Ordering Code Dimension : VENTURE


Code	Wattage	Nominal Flux	Beam angle	a	b	c	Weight(kg)
VEN02030	20W	2600lm	T2-S	425	163	75	3.1
VEN04030	40W	5200lm	T2-S	425	163	75	3.1
VEN06030	60W	7800lm	T2-S	425	163	75	3.1
VEN08030	80W	10400lm	T3-M	500	204	71	4.3
VEN10030	100W	13000lm	T3-M	500	204	71	4.3
VEN12030	120W	15600lm	T3-M	500	204	71	4.3

* The above ordering code is base on CCT~3000K

Dimension (mm)

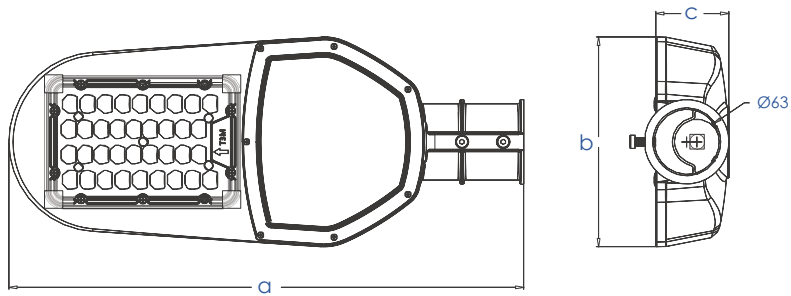

Photometry T2S



Photometry T3M

