


■ ARENA PRO Flood Lighting

Flood Lighting




Optional

Remote Control System & Smart
 Intelligent System available upon request



Energy saving with
 remote control system



Network for
 smart intelligent system

Application

Highmast, sport field, training, yard & Area

Characteristic

Light source	: High performance LED
Optical	: Multiple beam : PC lens modules
Power correction factor	: > 0.95
Insulation	: Class 1
Compliance	: IEC 60598-1 : IEC 60598-2-5
Ingress Protection (IP)	: IP66
Protection against surge (SPD)	: 20KA
Colour rendering (CRI)	: ≥ 70
Colour temperature (CCT)	: 3000K ~ 6500K
<i>Other CCT & CRI available upon request</i>	
Weight	: 21 kg
Wattage	: 800W ~ 1200W
Nominal efficacy	: ≥ 125 lm/W ~ 135 lm/W
Useful life	: > 100,000 hours ~ Base on the light source
Operating temperature range (Ta)	: -30°C ~ 50°C
Driver	: Built-in high efficiency system
Main voltage	: AC 100~277V / 50~60Hz

Features

- Unique convective air cooling design.
- High thermal conductivity, corrosion resistant construction.
- Excellent spill light control
- Anti glare reflector design
- Die cast aluminium alloy housing.
- Clear tempered glass.
- Optional : Intelligent driver available (0-10V, DALI, DMX)

Product Speciality



Adjustable Angle



Built in RGBW
 Mode



Built in:
 Anti Glare Visor




Optional:
 Top Arm Mounting

Ordering Code Dimension: ARENA PRO


Code	Wattage	Nominal Flux	a	b	c	d	e	f	Weight (kg)
ARP80057-V	800W	100000	608	623	484	152	136	490	21.0
ARP01K57-V	1000W	125000	608	672	484	152	185	490	21.0
ARP12K57-V	1200W	150000	608	672	484	152	185	490	21.0

* The above ordering code is base on CCT~5700K

Dimension (mm)

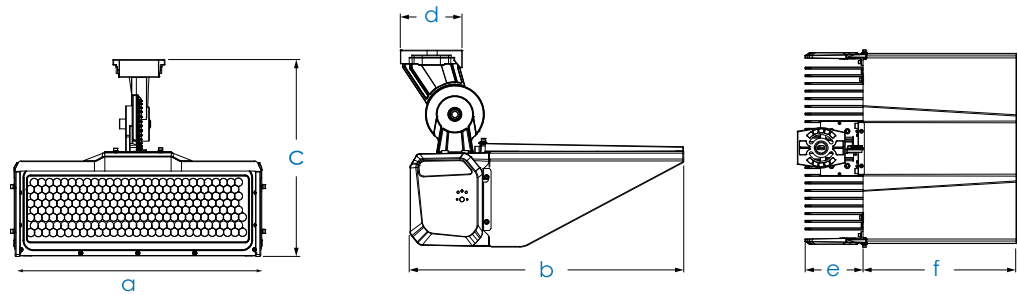

Photometry 15D

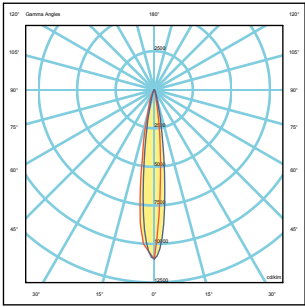

Photometry 40D

