


■ CIRCULAR Flood Lighting




Optional

Remote Control System & Smart
 Intelligent System available upon request



Energy saving with
 remote control system



Network for
 smart intelligent system

Application

Highmast, Sports, Stadium, Port, Light Tower, Large Area.

Characteristic

Light source	: Integral LED Module
Optical	: Multiple Beam
Power correction factor	: > 0.9
Insulation	: Class 1
Compliance	: MS IEC 60598-1, MS IEC 60598-2-5
Ingress Protection (IP)	: IP66
Protection against surge (SPD)	: 20KA
Colour rendering (CRI)	: ≥ 70
Colour temperature (CCT)	: 3000K ~ 6500K
<i>Other CCT & CRI available upon request</i>	
Weight	: 15.0kg ~ 28.0kg
Wattage	: 300W ~ 1250W
Nominal efficacy	: 120 ~ 150 lm/W
Useful life	: ≥ 50,000 hours
	~ Base on the light source
Operating temperature range (Ta)	: -30°C ~ 50°C
Driver	: Built-in high efficiency system
Main voltage	: AC100 ~ 277V / 50 ~ 60Hz

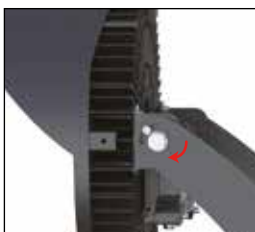
Features

- High pressure die cast aluminium alloy housing.
- Corrosion resistant.
- Finished with polyester powder paint.
- Standard color black.
- Anti-aging silicone rubber gasket.
- PC Lens
- High performance design flexibility and combination of optics.
- Bracket made of galvanized steel painted in black color.
- Stainless steel screws.
- Optional : Light louvre cover to reduce glaring.

Product Speciality



ThermalSafe®
 Thermal system



Adjustable Angle



Heat Dissipation



Optional - Laser
 Aiming Device

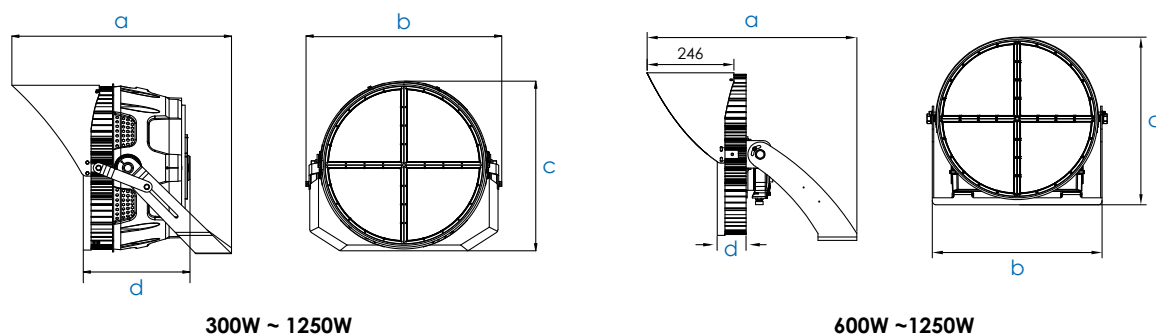





Optional - Louvre

Ordering Code Dimension: CIRCULAR

Code	Wattage	Nominal Flux	a	b	c	d	Weight (kg)
CIR030057	300W	39000	449	428	403	274	15
CIR040057	400W	52000	449	428	403	274	16
CIR050057	500W	65000	449	428	403	274	16
CIR060057	600W	78000	615	548	475	182	26
CIR080057	800W	104000	615	548	475	182	26
CIR100057	1000W	130000	615	548	475	182	26
CIR125057	1250W	162500	615	548	475	182	28

* The above ordering code is base on CCT~5700K

Dimension (mm)**Photometry 15D****Photometry 40D****Photometry 80D****Optional Visor Ordering Code: CIRCULAR**

Code	Description
CIR030057-V	Circular 300W with Visor
CIR040057-V	Circular 400W with Visor
CIR050057-V	Circular 500W with Visor
CIR060057-V	Circular 600W with Visor
CIR080057-V	Circular 800W with Visor
CIR100057-V	Circular 1000W with Visor
CIR125057-V	Circular 1250W with Visor