

■ AQUALED PRO Industrial Lighting




Optional

Remote Control System & Smart
 Intelligent System available upon request



Energy saving with
 remote control system



Network for
 smart intelligent system

Application

Parking Area, Canopy, Loading Bays, Industrial, Production Area,
 Integrated Transit, Factories and Foundries

Characteristic

Light source	: LED
Power correction factor	: > 0.9
Insulation	: Class II
Ingress Protection (IP)	: IP66
Colour rendering (CRI)	: ≥ 80
Beam Angle	: 120°
Colour temperature (CCT)	: 3000K ~ 6500K
<i>Other CCT & CRI available upon request</i>	
Weight	: 0.78kg ~ 1.5kg
Wattage	: 20W ~ 60W
Nominal efficacy	: 140 ~ 160 lm/W
Useful life	: > 50,000 hours
	<i>~ Base on the light source</i>
Operating temperature range (Ta)	: -20°C ~ 40°C
Driver	: Built-in high efficiency system
Main voltage	: 200 ~ 240V / 50 ~ 60Hz

Features


- Highly energy efficient - up to 150 lm/w.
- Rotary knob for tool-free wiring and fast installation.
- Flicker-free driver makes soft light and reduces eye fatigue.
- Microwave motion sensor *

* upon Request

Product Speciality



ON / OFF
 Function

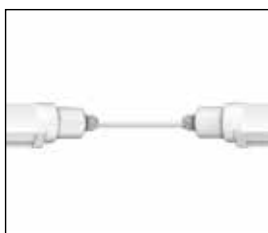

Optional:
 Linkable Connection




Optional:
 Ceiling Mounted

Ordering Code Dimension: AQUALED PRO

Code	Wattage	Nominal Flux	a	b	c	Weight (kg)
AQP02060	20W	3000	562	722	773	0.78
AQP04060	40W	6000	1162	1322	1373	1.05
AQP06060	60W	9000	1162	1322	1373	1.25
AQP05060	50W	7500	1462	1622	1673	1.25
AQP06060	60W	9000	1462	1622	1673	1.50

* The above ordering code is base on CCT~6000K

Dimension (mm)

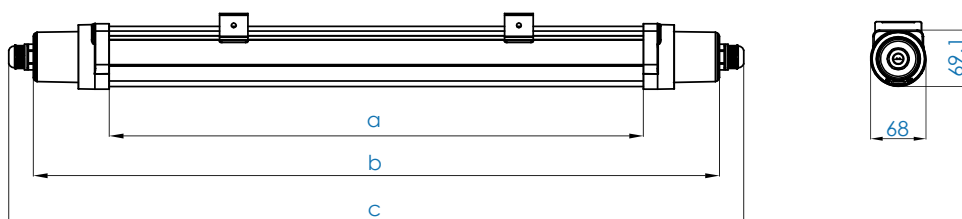

Photometry

