

■ AVENUE Industrial Lighting



Application

Parking Area, Canopy, Loading Bays, Industrial, Production Area,
 Integrated Transit, Factories and Foundries

Characteristic

Light source	: LED / Fluorescent tube
Ingress Protection (IP)	: IP65
Weight	: 1.0kg ~ 2.0kg
Wattage	: 10W, 20W (LED tube) : 18W, 36W (Fluorescent tube)*
Nominal efficacy	: 80 ~ 100 lm/W
Useful life	: > 30,000 hours ~ Base on the light source
Operating temperature range (Ta)	: -25°C ~ 55°C
Main voltage	: 220 ~ 240V / 50 ~ 60Hz

Features

- Stainless steel clip-on toggles.
- UV stabilized PC body and diffuser.
- Affordable & Reliable
- Dust proof & Moistureproof
- Microwave* / Motion Sensor*

* Item upon request

Installation Options

T8 LED tube

- Empty with T8 LED tube wiring (Standard with double ended)
- Complete with LED tube
- Complete with LED tube and 3hrs Power Pack


T8 Fluorescent tube

- Empty with T8 Fluorescent tube wiring
- Complete with T8 Fluorescent tube and electronic ballast
- Complete with T8 Fluorescent tube, electronic ballast and 3hrs Power Pack

Ordering Code Dimension: AVENUE

Code	Wattage	a	b	c	Size (ft)	Weight (kg)
AVN118	1X10W	655	100	105	2'	1.0
AVN218	2X10W	655	152	112	2'	1.2
AVN136	1X20W	1265	100	105	4'	1.6
AVN236	2X20W	1265	152	112	4'	2.0

Dimension (mm)

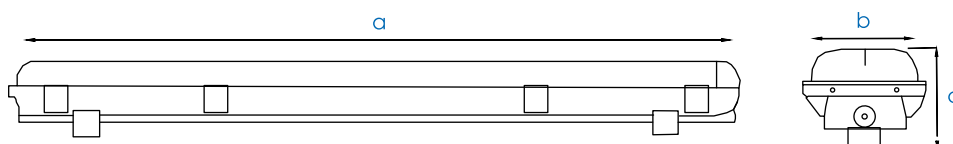

Photometry 120D

