

■ ORION-S Industrial Lighting



Application

Parking Area, Canopy, Loading Bays, Industrial.
 Architectural & Landscape.

Characteristic

Light source	: LED
Power correction factor	: > 0.95
Ingress Protection (IP)	: IP65
Colour rendering (CRI)	: ≥ 70
Colour temperature (CCT)	: 3000K ~ 5000K
<i>Other CCT & CRI available upon request</i>	
Weight	: 1.5 kg
Wattage	: 20W ~ 30W
Nominal efficacy	: > 70 lm/W
Useful life	: > 30,000 hours
	~ Base on the light source
Operating temperature range (Ta)	: -20°C ~ 40°C
Driver	: Built-in high efficiency system
Main voltage	: 220 ~ 240V / 50 ~ 60Hz

Features


- Enclosed luminaire for wall / ceiling
- Die-cast aluminum housing
- Finished with epoxy polyester paint
- High impact resistant opal polycarbonate diffuser
- Stainless steel locking devices
- Weatherproof and durable silicon sealed rubber gasket

Ordering Code Dimension: ORION-S

Code	Wattage	Nominal Flux	a	b	Weight (kg)
ORS02030	20W	1400	236	60	1.5
ORS03030	30W	2100	300	70	1.5

* The above ordering code is base on CCT~3000K

Dimension (mm)

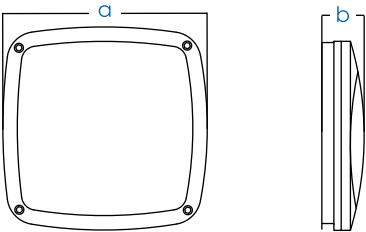

Photometry

