

■ STECH UGR Industrial Lighting




Optional

Remote Control System & Smart
 Intelligent System available upon request



Energy saving with
 remote control system



Network for
 smart intelligent system

Application

Factories, Warehouses, Logistic Halls, Production Facilities,
 Exhibition Hall, Showroom, Indoor Arena.

Characteristic

Light source	: High Performance LED
Power correction factor	: > 0.9
Insulation	: Class 1
Compliance	: MS IEC 60598-1
Ingress Protection (IP)	: IP65
Colour rendering (CRI)	: ≥ 80
Colour temperature (CCT)	: 3000K ~ 6500K
<i>Other CCT & CRI available upon request</i>	
Weight	: 1.7kg ~ 3.3kg
Mounting Option	: Hook Hanging / Ceiling Mounting
Wattage	: 100W ~ 200W
Nominal efficacy	: 135 lm/W - 160 lm/W
Useful life	: > 50,000 hours
	~ Base on the light source
Operating temperature range (Ta)	: -30°C ~ 45°C
Driver	: Built-in high efficiency system
Main voltage	: 100 ~ 270V / 50~60vHz

Features

- Die-cast aluminium housing.
- Corrosion resistant.
- Finished with polyester powder paint.
- Standard colour black.
- Anti-aging silicon rubber gasket.
- Clear PC cover
- Integral control gear mounted on the housing for easy maintenance.
- Stainless steel screws.
- Low UGR

Product Speciality



Zhaga Base



Optional:
 Ceiling Mounting



Optional:
 Bluetooth or
 Remote Control





Optional :
 Aluminum / PC reflector

Ordering Code Dimension: STECH UGR

Code	Wattage	Nominal Flux	a	b	c	d	Weight (kg)
SUR10065	100W	16000	ø280	55	116	173	2.4
SUR15065	150W	24000	ø280	55	116	173	2.4
SUR20065	200W	32000	ø320	55	116	173	3.3

* The above ordering code is base on CCT~6500K

Dimension (mm)

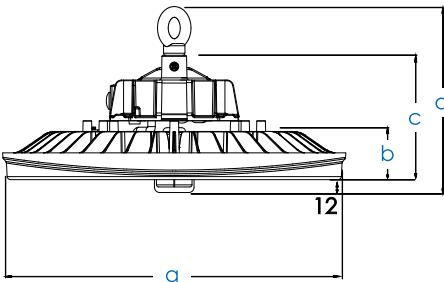

Photometry 80D

