

■ VENTURE Road Lighting



Application

Roadway, Residential Areas, Industrial Areas, Parking Areas,
 Factory Perimeter & Etc.

Characteristic

Light source	: EMC 5050
Optical	: PC Lens modules
	: Multiple beams
	: Anti glare optic
Power correction factor	: > 0.9
Compliance	: MS IEC 60529
Ingress Protection (IP)	: IP65
Protection against surge (SPD)	: 10KA ~ 20KA
Colour rendering (CRI)	: ≥ 70
Colour temperature (CCT)	: 3000K ~ 6000K
<i>Other CCT & CRI available upon request</i>	
Weight	: 3.1 kg ~ 4.5 kg
Wattage	: 20W ~ 120W
Nominal efficacy	: 120 ~ 150 lm/W
Useful life	: > 50,000 hours
	~ Base on the light source
Operating temperature range (Ta)	: -30°C ~ 50°C
Driver	: 1 ~ 10V dimmable driver*
Main voltage	: 100 ~ 277V / 50 ~ 60Hz

Features

- Die cast aluminium alloy housing.
- Pleasant Appearance
- Robust & compact
- Convenient, sturdy & light weight
- Affordable & economical
- Microwave* / Motion Sensor*

* Item upon request

Product Speciality

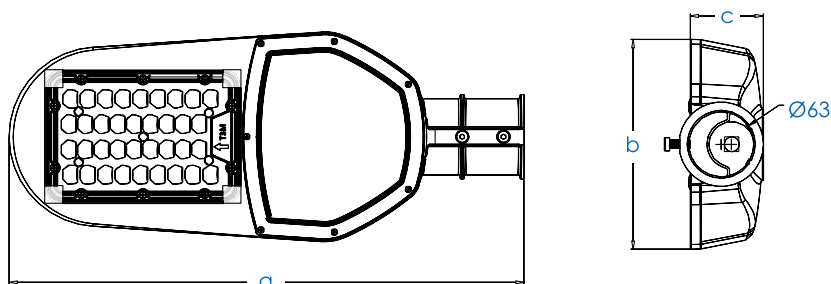



Compact & Light Weight

Ordering Code Dimension: VENTURE

Code	Wattage	Nominal Flux	Beam angle	a	b	c	Weight (kg)
VEN02030	20W	2600	T2-S	425	163	75	3.1
VEN04030	40W	5200	T2-S	425	163	75	3.1
VEN06030	60W	7800	T2-S	425	163	75	3.1
VEN08030	80W	10400	T3-M	500	204	71	4.3
VEN10030	100W	13000	T3-M	500	204	71	4.3
VEN12030	120W	15600	T3-M	500	204	71	4.3

* The above ordering code is base on CCT~3000K

Dimension (mm)**Photometry T2S****Photometry T3M**