

■ REMOTE ISOLAR LED Solar Lighting



Application


Street & Highway Lighting, Parking Lot & Area Lighting, Pedestrian.

Luminaire Characteristic


Housing	: Aluminium Alloy
Finishing	: Grey
Solar panel	: Monocrystalline
Light distribution	: Type II, Type III, Type IV
Ingress Protection (IP)	: IP66
Colour rendering (CRI)	: ≥ 70
Colour temperature (CCT)	: 3000K ~ 6000K
<i>Other CCT & CRI available upon request</i>	
Weight	: 15 kg ~ 80kg
Nominal efficacy	: 100 ~ 150 lm/W
Charging time	: > 6 hours
Discharge time	: > 12 hours / night
Working mode	: 4hr - 100%, 2hr - 60%, 6hr - 40%

Optional

Remote Control System & Smart
 Intelligent System available upon request




Energy saving with
 remote control system



Network for smart
 intelligent system

Product Speciality

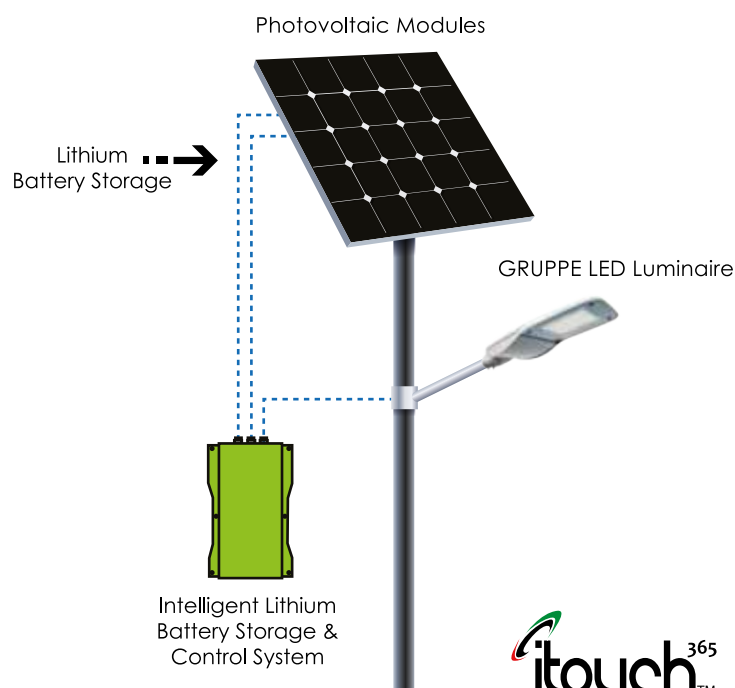

General Information

Recommended installation height : 2m to 12m
Autonomy days : 2 days

ALFA	PERCORSO III	Wattage	Lithium Battery	Solar Panel
ALF03030	N/A	30W	570Wh	60W
N/A	PE304030	40W	760Wh	70W
ALF06030	PE306030	60W	1140Wh	110W
N/A	PE308030	80W	1520Wh	150W
ALF09030	N/A	90W	1710Wh	160W
N/A	PE310030	100W	1900Wh	170W
ALF12030	PE312030	120W	2280Wh	210W
ALF15030	PE315030	150W	2850Wh	260W
ALF18030	PE318030	180W	3420Wh	310W

